

# Rammer® RPV29R

## ROTATING PULVERIZER DEMOLITION TOOLS



Rammer® RPV Rotating Pulverizer is ideally suited to a wide range of primary and secondary demolition duties. The built in 360° rotation that comes as standard on RPV Rotating range allows for added maneuverability for fast and effective material separation

### APPLICATIONS



Demolition



Recycling

### MAIN FEATURES AND BENEFITS

#### LOWER OPERATING COSTS

The protected rotation system allows precision tool placement resulting in lowering owning and operating costs

#### FIELD REPLACEABLE WEAR PARTS



Designed for quick and easy maintenance


#### RAMMER READY

Same bolt pattern as Rammer hammers

#### HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span

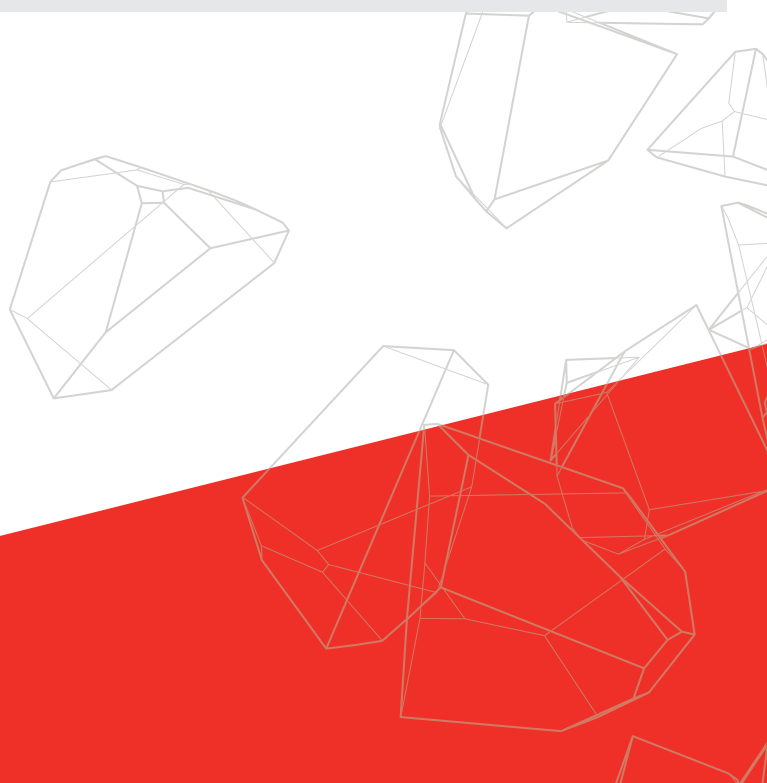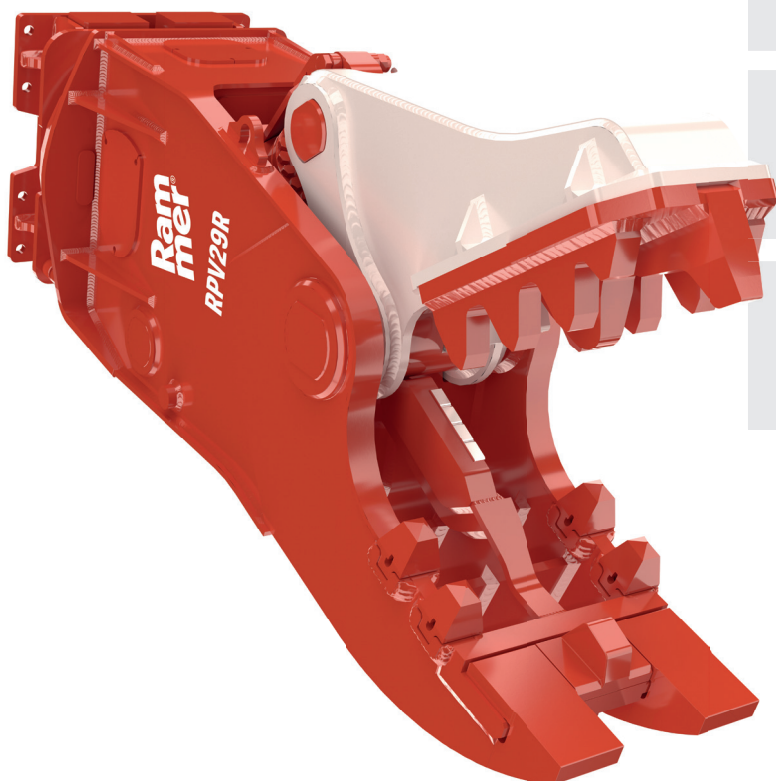

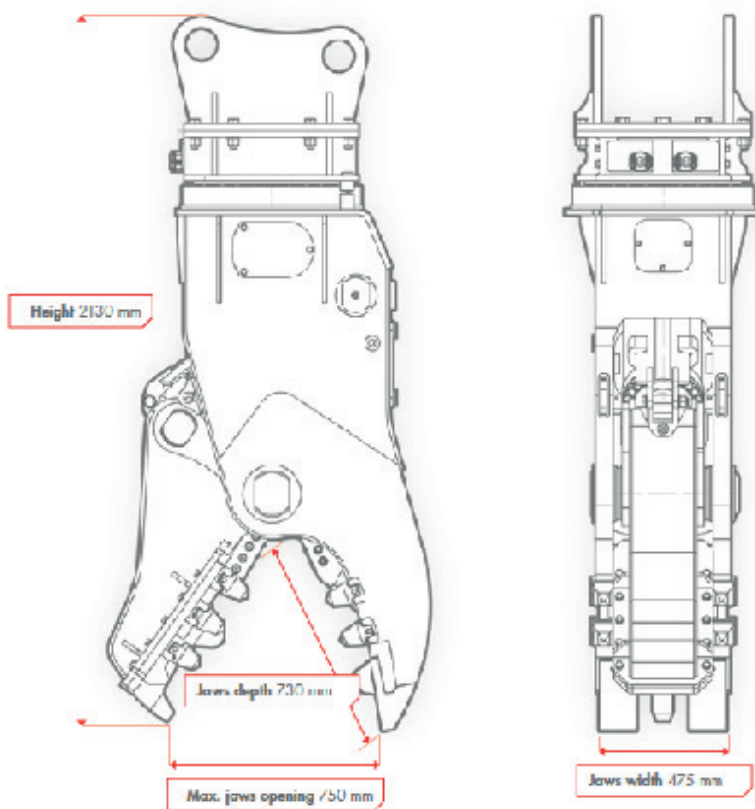

## Specifications

Minimum working weight	6590 lbs (2990 kg)
Weight	6110 lbs (2770 kg)
Max jaw opening	35.43" (900 mm)
Jaw width	21.6" (550 mm)
Jaw depth	28.74" (730 mm)
Max operating pressure	5075 psi (350 bar)
Max diameter to be cut	2.4" (61 mm)
Cutting blade length	8.7" (220 mm)
Rotation	360 °
Closing time at max oil flow	2.3 s
Opening time at max oil flow	2.3 s
Carrier weight range	57300-70500 lbs (26-32 T)

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

**Sandvik Rock Processing Solutions**

[www.rammer.com](http://www.rammer.com)